



3M™ Simtronics™ GD1-H2S

Laser Open Path Gas Detector



Presentation

The GD1 has been designed with features that provide an effective response to the detection of gas hazards in a wide range of industrial environments from offshore production facilities to wastewater treatment plants.

At the heart of the detector is a tunable laser diode that eliminates environmental effects from sun, rain, sand, and fog. The laser scans single absorption lines where there is no interference from other gases.

Unlike traditional methods for detecting H₂S (MOS or EC cell), the GD1 needs no recalibration and can replace multiple standard detectors to cover the same risk.

The complete optomechanical design and construction is so stable that an ultra fast response time can be achieved whilst providing unparalleled service life and detector stability, thus saving on maintenance and service costs.

The detector is supplied with worldwide hazardous area approvals, is suitable for SIL2 applications and comes with a 5 year warranty.

- Fail safe
- Fast response time
- Calibration free
- Operates up to 98% of obscuration

3M™ Simtronics™ GD1-H2S

Laser Open Path Gas Detector

Technical data

General

Detection method	IR- New IR laser scanning
Source	Tunable laser diode Laser Class 1, eye safe
Detected gas	H ₂ S
Range	0-200 ppm*m 0-500 ppm*m 0-1000 ppm*m 0-2000 ppm*m 0-5000 ppm*m 0-20000 ppm*m
Path length	5 - 75 m
Self test	Continuous
Calibration	Factory set, no field recalibration

Performance

Accuracy	<±4% of full range
Repeatability	<±4% of full range
Response time	<5 sec

Optics

Alignment	±0.30 Degree
Optics	Heated (transmitter and receiver)
Tolerable obscuration	98% (Allowable signal loss)

Output signal

Standard	4-20mA source or sink hart®
Fault signals	Fault 1 ma beam block 2 ma warning 3 ma (optional)

Electrical

Power supply	24V DC, range (18 - 32V DC)
Power consumption	<15 W
Cable entry	M25

Temperature range

Storage	-55°C to +65°C (-67°F to +149°F)
Operating	-55°C TO + 65°C (-67°F TO +149°F)
Atex flameproof	-55°C to + 75°C (-67°F to +167°F)
Humidity (operation)	100% Rh

Material

Tx and rx housing	Stainless steel (astm 316)
Junction box	Grp

Weight

Approx.	5.5 Kg (12 lbs) per tx or rx
Approx.	2.0 Kg (4.4 Lbs) per tx or rx junction box

Dimensions

Tx and rx housing	Ref. Outline drawing
-------------------	----------------------

Warranty


5 Years full warranty on detector system

Approvals

Atex rating tx/rx	II 2 g	Ex d [op is] IIC T6/T5 Gb
Atex rating jrb	II 2 g	Ex e IIC T5 Gb
iecex	DNV 10.0002X (JB: PRE 14.0040)	
Ingress	IP66/IP67 according to IEC 60529	
Sil	Suitable for use in SIL2 systems	

Accessories

GD1-X00-TT01	Alignment kit
GD1-X00-TT02	Test cell

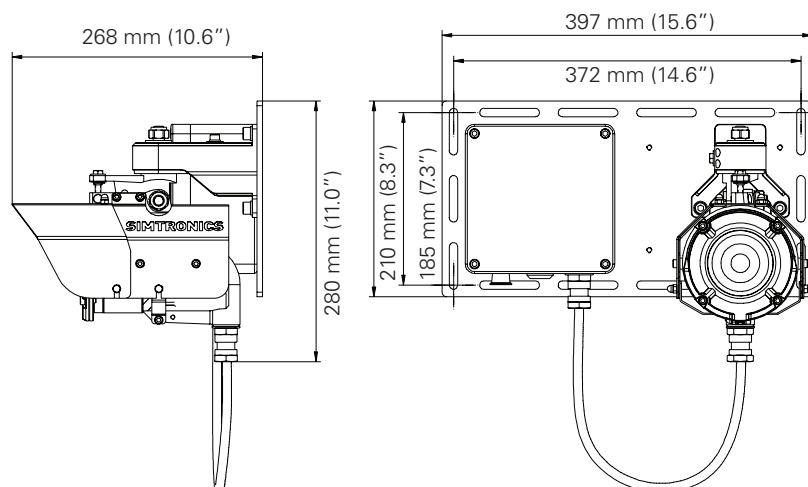

Simtronics is a world-class provider of sophisticated gas and flame detection systems. The company has more than 25 years' experience in supplying gas detection for use in applications ranging from plant boiler rooms to offshore petrochemical facilities. Simtronics' products are used worldwide to help protect life and assets.



Copyright © 2018 3M, 3M Gas & Flame
Detection. All rights reserved.
gasdetection.3m.com. GF-00257C-EN

SIMTRONICS AS
Kabelgaten 8, Økern Næringspark
P.O. Box 31 4, Økern, NO-051 1
Oslo, Norway
Tel. +47 2264 5055

SIMTRONICS SAS
792, av de la Fleuride
BP 11 061, 13781 AUBAGNE
CEDEX - FRANCE
Tel : +33 (0) 442 1 80 600